

Domestic / TILE Installation Procedure



Place the baseplate onto the roof and mark the tile to be removed.




Push the marked tile up under the tile directly above it.



Bend the left and right side of the baseplate to more or less the same contour as the tiles.



Pop rivet the top and sides of the baseplate to the tiles using long pop rivets.

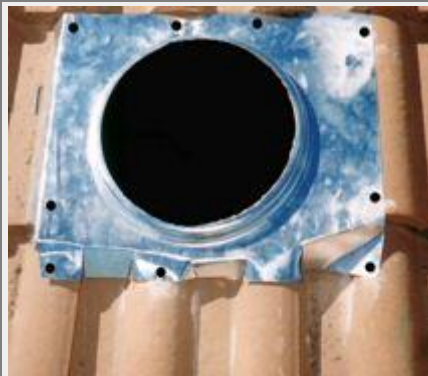

Cut the bottom end of the baseplate and bend it down, and rivet it to tiles using long pop rivets.



Waterproof baseplate using membrane and waterproof sealer.



Place turbine on baseplate and make sure the locking clips are loose.



Adjust throat in order to get the top section of the throat and the dome in a level position



Fasten the locking brackets



Fix the throat onto the baseplate by drilling and using pop rivets



Finished product.